


CLA Type Hand-Pull Manual Lubricators



CLA Type Hand-Pull Manual Lubricators

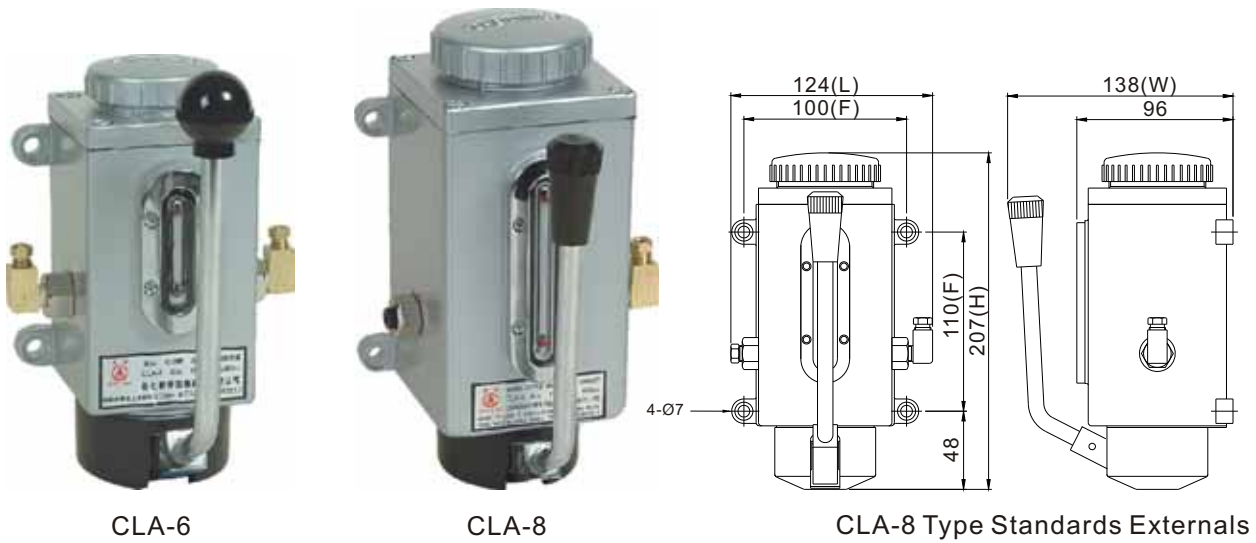

CLA-6

CLA-8

CLA-8 Type Standards Externals

◆ Features

1. CLA type is divided by the volume of container CLA-6(350cc) and CLA-8(600cc).
2. Low cost, high practicality. It can be used in diverse machinery.
3. Easy to be operated by pushing the handle down for oil feeding.
4. Small volume and easy to install.
5. The unit is equipped with reverse stopper that prevents the back-flow of oil.
6. It has an oil outlet on left or right side of the unit. A dual outlet (left and right sides) is also available.

◆ Application of Machines Equipment

1. This unit can work with the machines that do not need to feed oil at certain time.
2. It's suitable for various kinds of machine tools and automatic machinery.

Model	Max Volume	Max Pressure	Capacity	Discharge Bore	Discharge Bore No.	Fixed Hole Distance(mm)	Length (mm)	Width (mm)	Height (mm)	Oil Viscosity	Weight (kg)
CLA-6	8cc	15kgf/cm ²	350cc	Ø4	1	85, 85mm	112	134	188	32-68cSt@40°C	1.23
					2						1.25
				Ø6	1						1.24
					2						1.27
CLA-8	8cc	15kgf/cm ²	600cc	Ø4	1	100, 110mm	124	138	207		1.50
					2						1.52
				Ø6	1						1.50
					2						1.53

◆ Order code :

CLA-6

Tank Capacity
6 : 350cc
8 : 600cc

R

L : Left Hand Outlet
R : Right Hand Outlet
D : Dual Outlet

H

Outlet Connector
H : Elbow Adapter
D : Straight Adapter
B : Block

1

Discharge Bore
0 : Ø4
1 : Ø6

✳

Special Request