



AFC2000



AFC2000



BFC(2000 ~ 4000)

FRL

AC, BC

AFC, BFC

AF, BF

AR, BR

AFR, BFR

AL, BL

JAC

JAF

JAR

JAW

JAL


PTH

JAD

Ordering Code

BFC	3000	D
Model	Port size	Drain Type
AFC: Small	1500: G1/8"	Blank: Semi-automatic
	2000: G1/4"	D: Automatic
	3000: G3/8"	
BFC: Medium	4000: G1/2"	

Symbol



Specification


Model		AFC1500	AFC2000	BFC2000	BFC3000	BFC4000
Operating Fluid		Air				
Port Size		G 1/8"	G 1/4"	G 1/4"	G 3/8"	G 1/2"
Filter Precision		40 μ				
Range of Adjustable Pressure		0.05 ~ 0.85 MPa				
Max. Adjustable Pressure		0.95 MPa				
Ensured Pressure Resistance		1.5 MPa				
Operating Temperature Range		5 ~ 60 °C				
Capacity of Filter Cup		15 cc			60 cc	
Capacity of oil Cup		25 cc			90 cc	
Suggested Lube		ISO VG 32 or Same Grade Oil				
Weight		0.5 KG			0.7 KG	
Material	Body	Aluminum Die-casting Forming				
	Container Cup	PC				
	Protective Cover	-			Iron	
Composed Elements	Filter Regulator	AFR1500	AFR2000	BFR2000	BFR3000	BFR4000
	Lubricator	AL1500	AL2000	BL2000	BL3000	BL4000

AFC, BFC Series

Two-point Combination (FR.L. Combination)

Overall Dimension

AFC

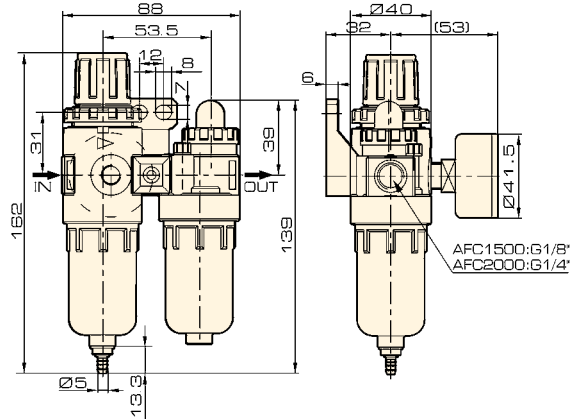

BFC

