


12

Paint Hose

Tried. Tested. And Wanted.

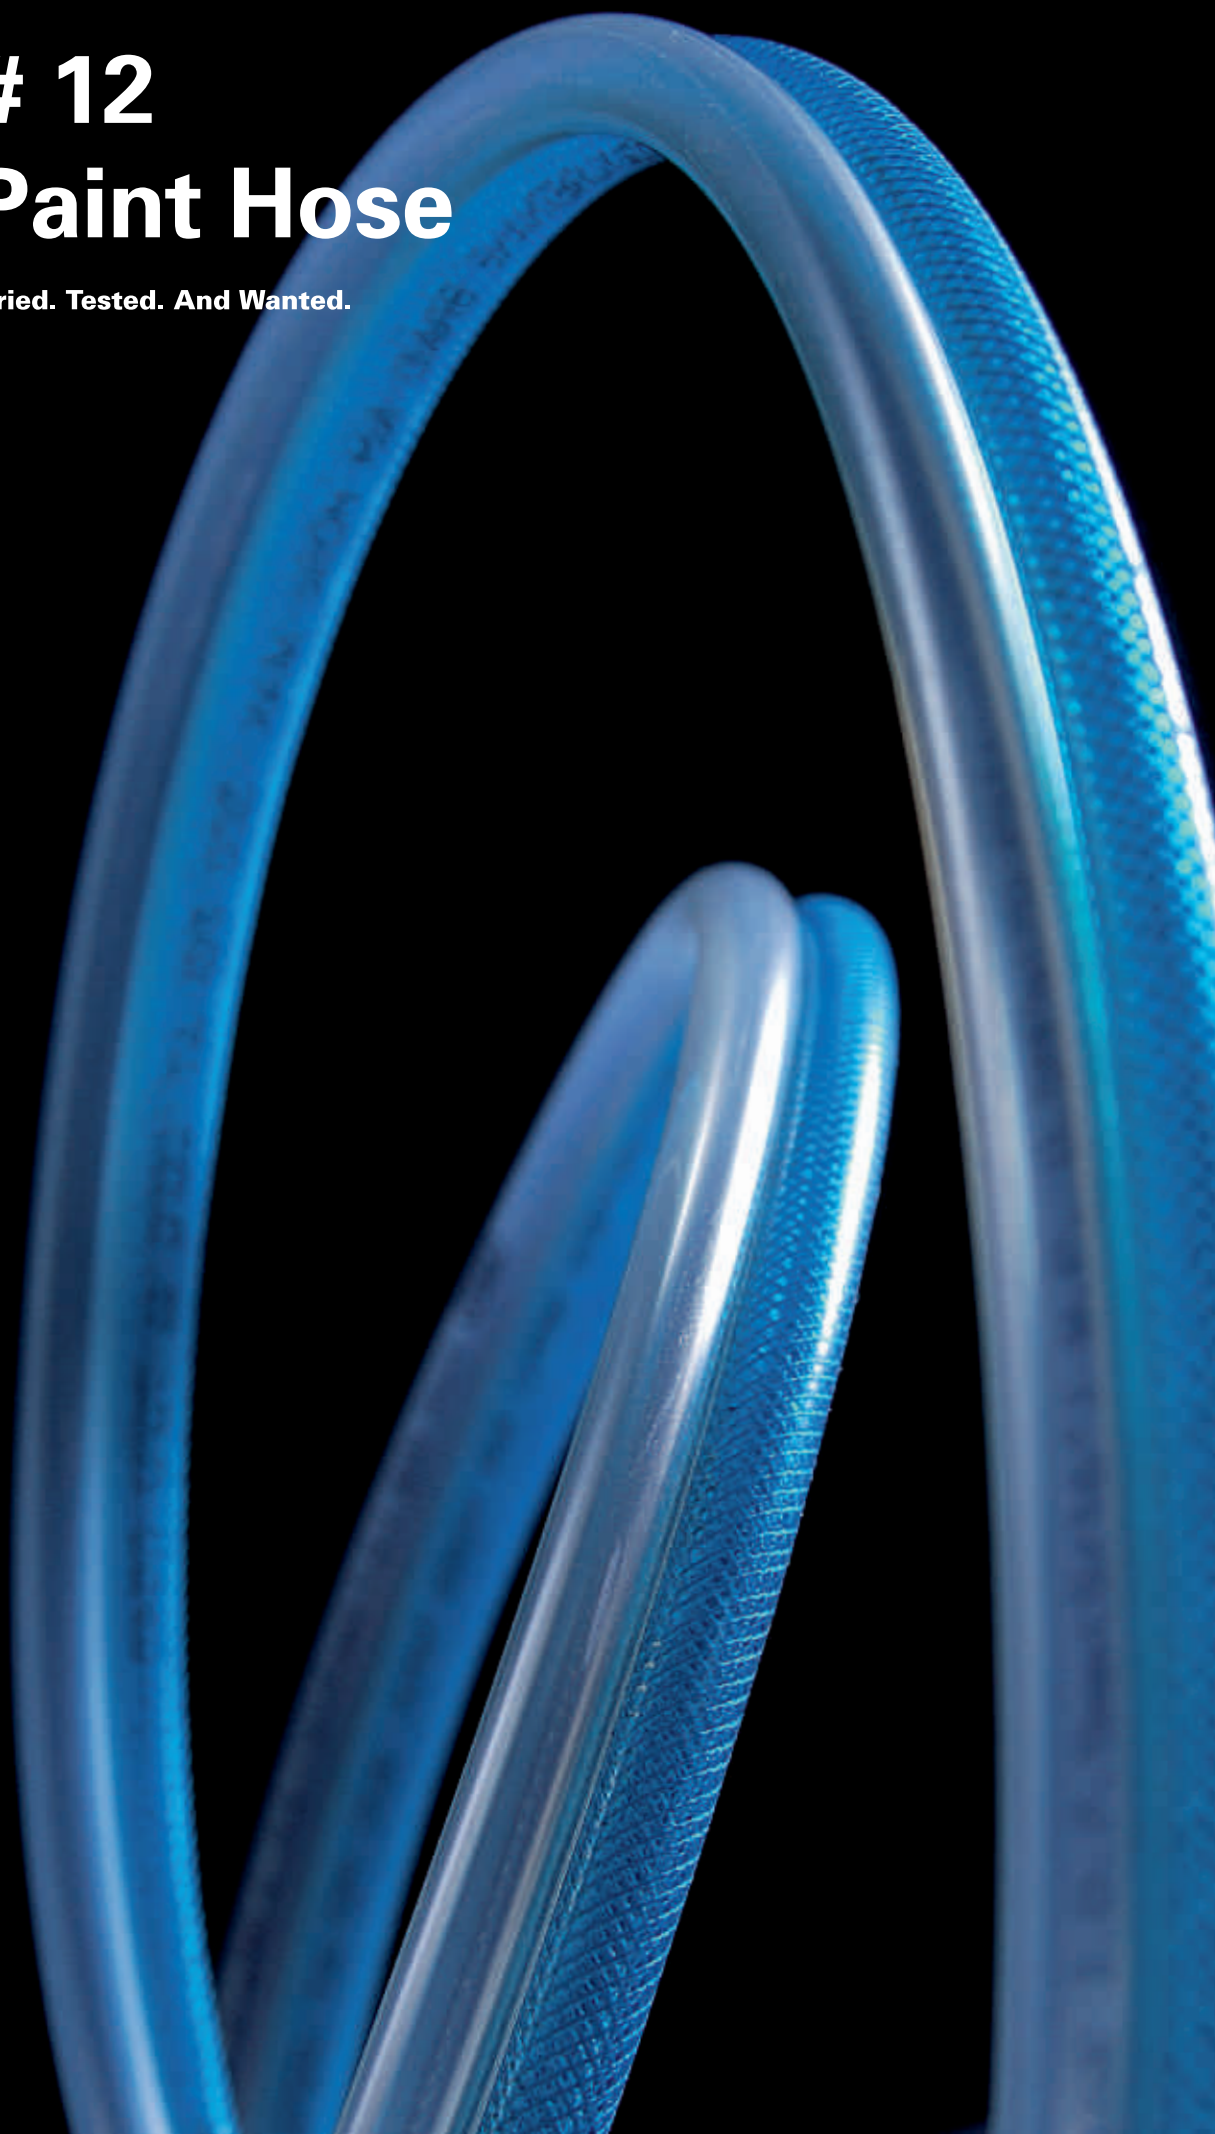

PRODUCT DESCRIPTION

FEATURES

- Pressurized Paint & Thinner Transport
- Pressurized Paint Transport Tank & Pump
- Superior resistance against solvents.
- Perfect for pressurized solvent transport

ORDER & PACKAGING

PLACING AN ORDER OR REQUEST

Specifying Standard Items:

Please specify the following:


1. Series(Item) Number
2. OD. Size
3. ID. Size
4. Tube length (Please specify Metric/Imperial)
5. Color

Example of a request

15M of 10.5 x 7.5 Natural Paint Hose



15M of 10.5 x 7.5 Natural Paint Hose With 10.5 x 6.5 Clear Blue Air Hose

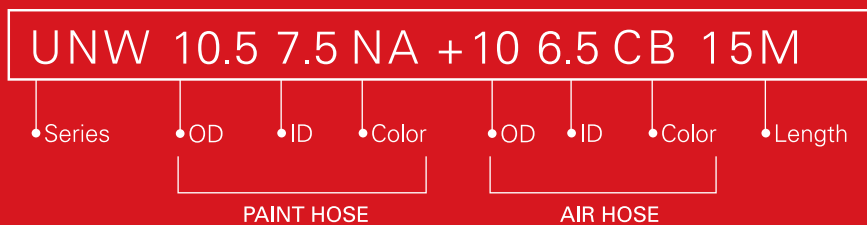

PACKAGING	TYPE	PACKAGING	TYPE
	<p><i>Paper Reel</i></p>		<p><i>Box</i></p>
	<p><i>Skin</i></p>		<p><i>Plastic Bag</i></p>

* Other sizes, colors, printing, length and package option may be available

PAINT SINGLE HOSE

Series

UNS Single Hose

Temperature Range

-40°C ~ 70°C / -40°F ~ 158°F

Working Pressure

4 to 1 safety factor

Material

Inner / Nylon 12


Outer / Polyurethane

Standard color

NA. Natural

SIZE

PART NUMBER	HOSE OD (mm)	HOSE ID (mm)	WORKING PRESSURE AT 23°C (kg/cm ²)	BURST PRESSURE AT 23°C (kg/cm ²)	MATERIAL LENGTH (m)
UNS75105	10.5	7.5	7	28	50.100

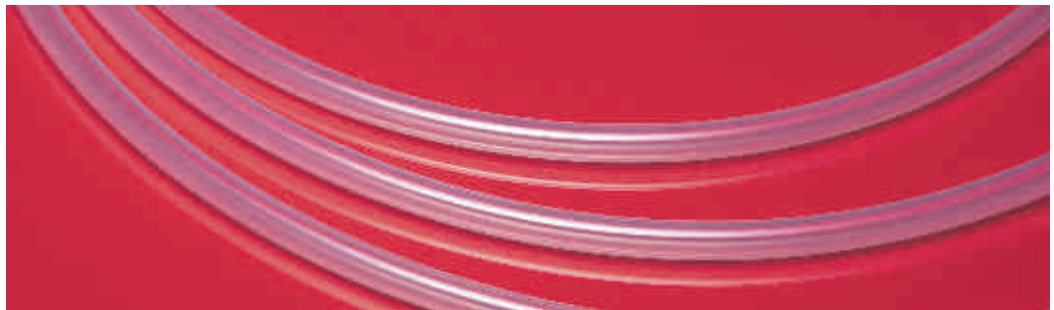

PAINT TWIN HOSE

Series

UNW Twin Hose

Temperature Range

-40°C ~ 70°C / -40°F ~ 158°F

Working Pressure

4 to 1 safety factor

Material

Paint Hose: Inner / Nylon 12, Outer / Polyurethane

Air Hose: Polyurethane Braid

Standard color

Paint Hose: NA. Natural

Air Hose: CB. Clear Blue

SIZE

PART NUMBER	HOSE	HOSE OD (mm)	HOSE ID (mm)	WORKING PRESSURE AT 23°C (kg/cm ²)	BURST PRESSURE AT 23°C (kg/cm ²)	MATERIAL LENGTH (m)
UNW75105	Air	10	6.5	15	60	50.100
	Paint	10.5	7.5	7	28	50.100

